

DELTA® protects property

DELTA®


DELTA®-VENT S PLUS / DELTA®-VENT S

The economic sheathing membrane for pitched roofs



DELTA®-VENT S PLUS / DELTA®-VENT S

The economic, mid-range sheathing membrane with and without a self-adhesive edge

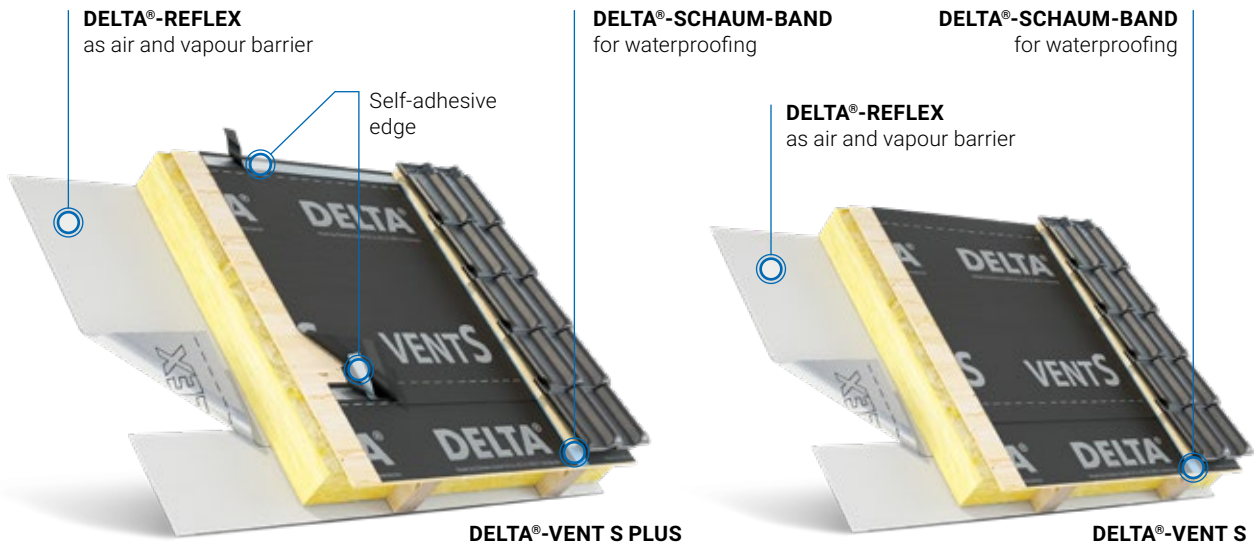

DELTA®-VENT S PLUS / DELTA®-VENT S – the essentials in brief

Material	3-ply pitched-roof membrane made from a tear-resistant, breathable spunbonded PP membrane combination made with the latest BiCo fibre technology. DELTA®-VENT S PLUS with integrated adhesive zones on both edges.
Suitability	For fully insulated pitched roofs with and without boarding.
Flammability	Class E, EN 13501-1
Tear strength	approx. 310/260 N/5 cm, EN 12311-1
Watertightness	Class W1, EN 13859-1+2
S_d value	approx. 0.02 m
Thermal stability	-40 °C to +80 °C
Short-term maximum thermal load	+100 °C
Resistance to driving rain	Passed: driving rain test, sarking membranes and underlay sheets – Technical University of Berlin
Weight	approx. 150 g/m ²
Roll weight	approx. 11 kg
Roll dimensions	50 m × 1.50 m

Accessories



DELTA®-MULTI-BAND



DELTA®-THAN



DELTA®-FLEXX-BAND



DELTA®-SCHAUM-BAND SB 60

Advantages at a glance

- ▶ DELTA®-VENT S PLUS: Easy and cost-efficient to lay thanks to adhesive zones on both edges. The strip system in the upper adhesive zone assures additional protection against rising damp in the overlap zone.
- ▶ 3-ply sheet that offers a superior advantage against mechanical stress when being laid.
- ▶ Optimized for laying on rough timber boarding.
- ▶ The ideal roofing membrane below slates, fibre cement slates and shingles.
- ▶ The ideal vapour permeable airtight layer below wood fibre insulation boards.

DELTA®-VENT S PLUS / DELTA®-VENT S – permanently reliable safety:



Breathable –
releases moisture



Facilitates windtight
constructions



UV protection



Resistant to
driving rain



Watertight



Economic



Dörken GmbH & Co. KG
Wetterstraße 58
58313 Herdecke

- +49 23 30/63-636
- +49 23 30/63-357
- bvf@doerken.de
- www.doerken.com/int
-  

A member of **DÖRKEN**GROUP



For further information material
visit our website and select Downloads



To find the right contact
partners for sales and technology
visit our website and select Contact



PEFC™ PEFC certified
This paper comes from sustainably managed forests and controlled sources